

Refrigerant R134a (HFC)


Standard Inlet Air Temperature

IDF□E Series

1E, 2E, 3E, 4E, 6E, 8E, 11E, 15E1

(Inlet air temperature: 35°C, Outlet air pressure dew point: 10°C)

How to Order

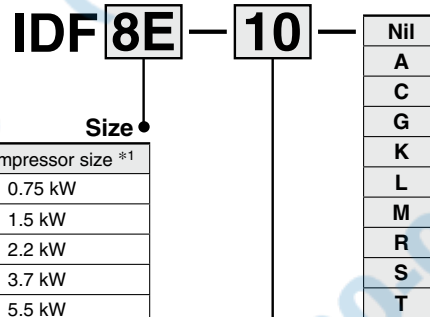

*1 Note that the above values are for reference only. Check the actual compressor capacity.

Symbol	Voltage	Applicable size							
		1E	2E	3E	4E	6E	8E	11E	15E1
10	Single-phase 100 VAC (50Hz)	●	●	●	●	●	●	●	●
	100/110 VAC (60Hz)								
20	Single-phase 200 VAC (50Hz)	—	—	●	●	●	●	●	●
	200/220 VAC (60Hz)								

		Options									
Symbol *1	Description	Nil	A	C	G	K	L	M	R	S	T
		None	Cool compressed air output	Anti-corrosive treatment for copper tube	With Chinese labels and a Chinese operation manual	Moderate pressure specification *2 (Auto drain bowl: Metal bowl with level gauge)	With a heavy-duty auto drain (applicable to moderate pressure)	With a motor type auto drain	With an earth leakage breaker	Power supply terminal block connection (Voltage symbol 10 only) *3	With a terminal block for power supply, operating, and error signals *4
1E		●	●	●	●	—	—	—	—	●	—
2E		●	●	●	●	—	—	—	—	●	—
3E		●	●	●	●	—	—	—	—	●	—
4E		●	●	●	●	—	●	●	●	●	●
6E		●	●	●	●	●	●	●	●	●	●
8E		●	●	●	●	●	●	●	●	●	●
11E		●	●	●	●	●	●	●	●	●	●
15E1		●	●	●	●	●	●	●	●	●	●

*1 When multiple options are combined, indicate symbols in alphabetical order.

However, the following combinations are not possible.

- R and S (Because S function is also included in R.)
- S and T (Because S function is also included in T.)

· The combination of K, L and M is not possible because an auto drain can only be attached to a single option.

*2 The maximum operating pressure is 1.6 MPa.

*3 Voltage symbol 20 (200 VAC) is the terminal block connection as standard. The Option S cannot be chosen.

Voltage symbol 10 (100 VAC) is the power cable with plug as standard.

*4 To users who are considering switching from the previous air dryer:

When switching from the previous air dryer and remote operation are required, select the Made to Order (IDF□E-□-X256) product.

* Refer to pages 28 to 32 for further information on options.